
Innovation in Motion
TSUBAKI

Floor Friction Transfer System

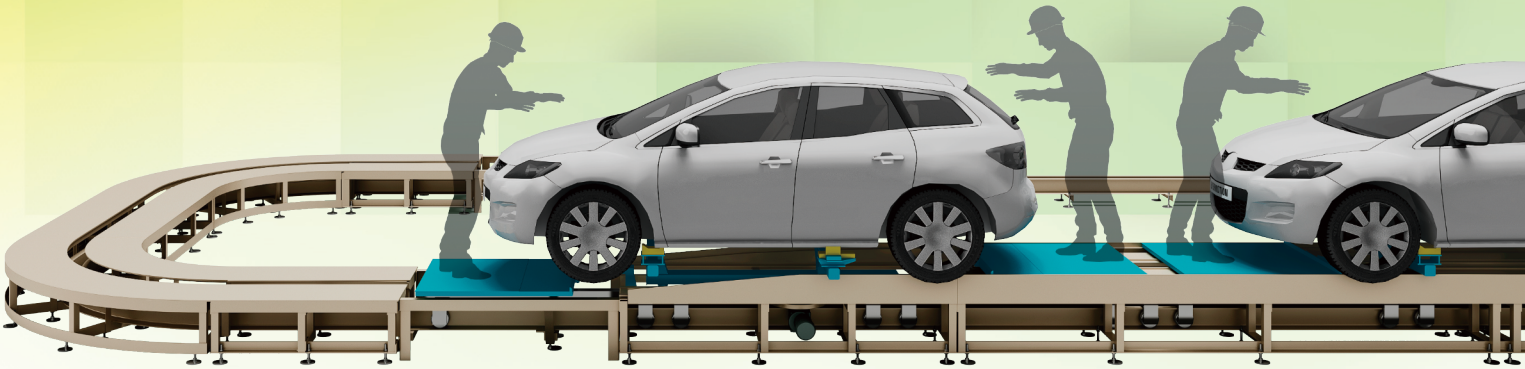


Point 1 Movable work platforms located at the front and back of a carrier enable operators to work in front of and behind a load on the work line

Point 2 Simple, compact transfer cross-section surface shortens the work period for a layout change and minimizes the carriage return space

Point 3 Widened pitch of the carrier travel roller suppresses body vibrations to provide stable transfer and reduce rail wear

Specifications	
Transfer method	Friction transfer
Weight capacity	2,500kg
Transfer velocity	2 to 10 m/min
Transfer pitch	Determined depending on the load to be transferred
Inclined transfer	Available
No. of carriers	Six
Rail shape	C-shaped steel

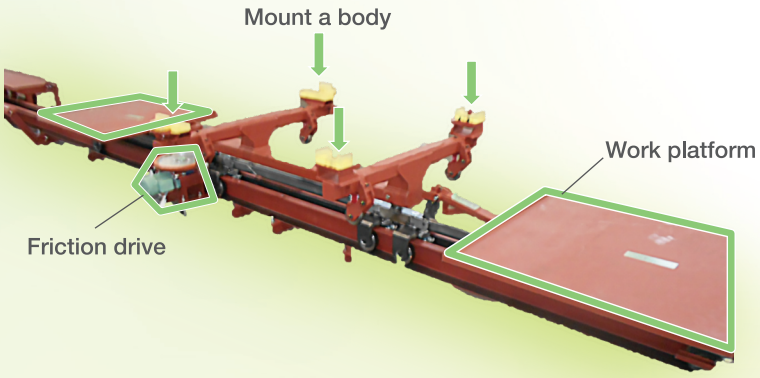

Catalog No.24305_2025/3/1 JPN-BN.23301_2023/4/1 ©TSUBAKIMOTO CHAIN CO.